





DF7651

Product Features:

- Exterior/Reversible Side: 1.8-oz, 100% nylon taffeta
- Fill: 3.9-oz, poly-fill
- Drawcord and toggles at hem
- Detachable carabiner keychain located in left hand pocket
- Reverse coil zippered right chest pocket on smooth side
- Locker loop on smooth side
- Reverse coil zippered hand pockets on quilted side

Adult sizes: XS-4XL

Icons/Fabric Features:

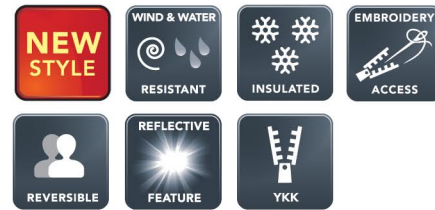

Available Colours and PMS Colours

Textile fabric colours are subject to dye lot variation and will not be exact match to print pantone reference

ASPHALT / BLACK

GLACIER GREY / BLACK



432C / BLACK 6C

428C / BLACK 6C

WARMTH RATING	MILD	WARM	WARMER	WARMEST
WATER PROTECTION	WATER RESISTANT		WATERPROOF	
WIND RESISTANT	YES			
INSULATION	3.9-OZ, SYNTHETIC INSULATION			

Due to the nature of nylon, special care must be taken throughout the decoration process

DF7651 - DRYFRAME® Dry Tech Reversible Liner Jacket

GARMENT MEASUREMENTS

Size	XS	S	M	L	XL	2XL	3XL	4XL
Chest - Half Measure	20 1/2"	22"	23 1/2"	25"	26 1/2"	28"	30"	32"
Chest - Full Measure	41"	44"	47"	50"	53"	56"	60"	64"
Body Length from HPS (At Front)	27 3/4"	28 1/4"	28 3/4"	29 1/4"	30 1/4"	31 1/4"	31 1/4"	32 1/4"
Body Length from HPS (At Back)	28 1/4"	28 3/4"	29 1/4"	29 3/4"	30 3/4"	31 3/4"	32 1/4"	32 3/4"
Sleeve Length-CB	34 1/4"	35"	35 3/4"	36 1/2"	37 1/4"	38"	38 3/4"	39 1/2"

Finished measurements in inches. Refer to "How to Measure" guide for detailed information on measurement instructions.

ADULT General Sizing Guide

Size	XS	S	M	L	XL	2XL	3XL	4XL
Chest	30"-32"	34"-36"	38"-40"	42"-44"	46"-48"	50"-52"	54"-55"	56"-57"
Waist	26"-29"	29"-32"	32"-35"	35"-38"	38"-41"	41"-44"	44"-47"	47"-50"
Sleeve Length-CB	31"-32"	32"-33 1/2"	34"-35"	35"-36"	36"-37"	37"-38"	38"-39"	38 1/2"-39"



PRINTING INSTRUCTIONS FOR NYLON FABRICS

Due to the nature of Nylon fabric, special care must be taken throughout the decoration process. Special care must be taken during the decoration process and after.

Here are some tips to effectively decorate these products.

Heat Transfer/Screen Printing:

- Garment temperature must not exceed 310°F or 154°C.
- Use fast fushion/low cure temperature ink to help prevent the need for a higher temperature to cure the ink.
- A test sample run is recommended in all printing processes, especially if you have a large order or if your printer does not specialize in